

**CONNECTING:**


**Rear view of CD Player:**



- 1) Outputs left (L) and right (R) channel
- 2) Coaxial output (to a converter D/A)
- 3) Optical output (to a converter D/A)
- 4) Power Input
- 5) Power switch ON/OFF

**DETAILS OF FUNCTIONS:**

**Front view of the CD Player:**

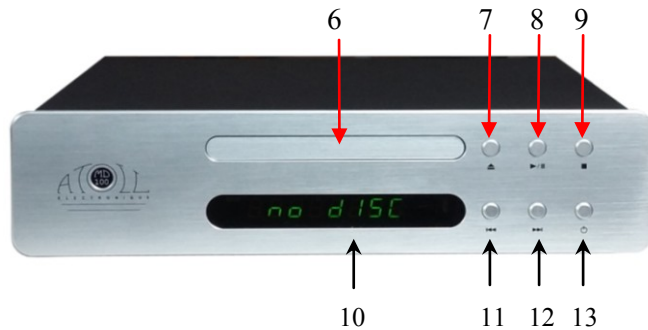

- 6) Disc tray
- 7) Open/close
- 8) Play & Pause
- 9) Stop: *stop functions Play & Repeat*
- 10) Display
- 11) Previous track
- 12) Next track
- 13) Stand-by: *stand-by cancels all functions*

**REMOTE CONTROL:**

Keys 8, 9, 11, 12 & 13 have the same functions as on the front panel.

14) Rear fast search key.

15) Forward fast search key.

16) TIME :  
*Displays running time of each track. With one press, display the remaining time of the track.*

17) Repeat MODE : *(This function is also available while reading the disc)*

Press on REP to choose the repeat mode:

- **LOOP ONE** : Makes a repetition of the same track. Confirm by pressing ENTER key.
  - **LOOP ALL** : makes a repetition of the complete disc. Confirm by pressing ENTER key.
- STOP key cancels REPEAT modes. Displays **LOOP OFF**.

18) SHUFFLE:

Press on SHUF. Display shows **SHUFFLE** during 1 second and Disc goes on play. All tracks will be played once in random mode. Press STOP to cancel the random play and displays shows SHF OFF.

19) PROGRAM:

Press on PROG. Display shows on the Left the number of selected tracks and on the Right the choice of tracks.

Choose the first track of the program with the selection keys 20). Confirm by pressing on PROG or ENTER. Select all track needed for the program, using the same procedure.

Display shows number of tracks (on the Left) and the total time of the program.


Press PLAY to start playing the program.

Press 2 times to cancel the program.

**Combination:**

It is possible to combine a program with the REPEAT function (display shows **LOOP**) or SHUFFLE functions (display shows **SHUF**).

20) Keys ENTER, Arrows, Left & Right : Allows selection of tracks in the program.

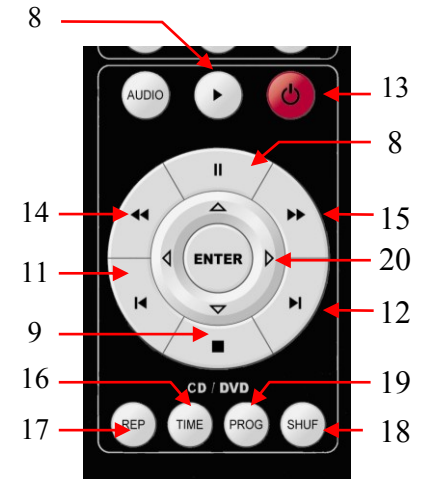

### E.C. MARKING:

E.C. marking certified the conformity with low tension directive 73/23/CEE, directive CEM 89/336/CEE and national transpositions.

### GUARANTEE:

The guarantee is **two years** long from date of purchase. We recommend you to ask your dealer to fill the guarantee and to conserve it. The guarantee is only available for appliance which have been use correctly.

### CLEANING:

Before any cleaning, switch off your CD player (5). Use a soft and dry rag to clean up the appliance. Never use acetone, white-spirit, ammoniac, or any kind of product containing abrasive agent. Never try to clean up inside the appliance.

### Technical Specifications:

<b>Power Supply:</b>	<b>15VA</b>
<b>Total of capacitors:</b>	10 411 $\mu$ F
<b>Dynamic:</b>	112 dB
<b>Output Level:</b>	2 VRMS
<b>Signal/Noise Ratio:</b>	112 dB
<b>Distortion at 1kHz:</b>	0,002%
<b>Bandwidth:</b>	5Hz – 20kHz
<b>Rising Time:</b>	2 $\mu$ s
<b>Digital/analog Converter:</b>	PCM5102
<b>Dimensions:</b>	320x230x83 mm
<b>Weight:</b>	3,4 Kg

*Specifications are subject to modifications*

*You have just bought a CD player with exceptional audiophile performance. We really thank you for your confidence in our products. To get the best part of your CD player, please read carefully this manual.*

### CAUTIONS :

- Put your CD player in a dry and well ventilated place, far from source of heat;
- Do not put something on your CD player;
- **Do not make any plug in when the CD player is on;**
- Avoid any short-cut;
- Respect polarity + & - and switch left & right;
- Do not put your CD player too close from a Tuner because of disagreement in HF reception.

*You will find enclosed:*

- a CD player ;
- a remote control (with 2 batteries Lithium CR2025) ;
- a powerlead ;
- a modulation interconnect ;
- this manual with the certificate of guarantee.

ATOLL ELECTRONIQUE® is a French Company who conceive, manufacture and sales all its products.

# OWNER'S MANUAL

## CD PLAYER

MD100



### **GUARANTEE - CD PLAYER - MD100**

To present to your dealer with the invoice when returning back the appliance.

ATOLL ELECTRONIQUE  
Blvd des Merisiers  
50370 BRECEY  
FRANCE

*Dealer stamp*

*Date of purchase :*

*Place of purchase :*

*Buyer signature :*

ATOLL  
ELECTRONIQUE